
TECHNICAL SPECIFICATIONS – SEYIT 6X6

		SEYIT 6X6
DIMENSIONS	Length	9410 mm
	Width	2550 mm
	Height	3175 mm
	Wheelbase	4800 mm
	Ground Clearence	490 mm
	Angle of Approach	35°
	Angle of Departure	35°
	Ramp Angle	24°
	Number of Seats	3
WEIGHTS	Payload Capacity*	18500 kg
	Gross Vehicle Weight (GVW)	33000 kg
PERFORMANCE	Maximum Speed	90 km/h
	Cruising Range	750 km
	Grade Ability	60%
	Side Slope	30%
	Fording	1000 mm
	Trench Width	800 mm
	Vertical Step	400 mm
	Turning Radius	10±1 m
	Operating Temperature	-32 °C / +55 °C
ENGINE	Model	Cummins ISG12
	Fuel	EN 590, F-54,F65,F34
	Emission Certification	Euro 3
	Maximum Power	373kW (510 HP) @ 1900 rpm
	Maximum Torque	2100Nm @ 1000-1600 rpm
TRANSMISSION	Model	Allison 4000 SP
	Type	Automatic
	Number of Gears	6 Forward / 1 Reverse
OPTION LIST	Armored Cab, CTIS, Runflat, Retarder, ADR Compliance, PTO, RHD, Self-Recovery Winch, Reversing Camera, Front Camera	
SUPER STRUCTURE TYPES	Personal Carrier, Fuel and Water Tanker, Mobile Winch, Container Carrier, Special Purpose Body etc.	



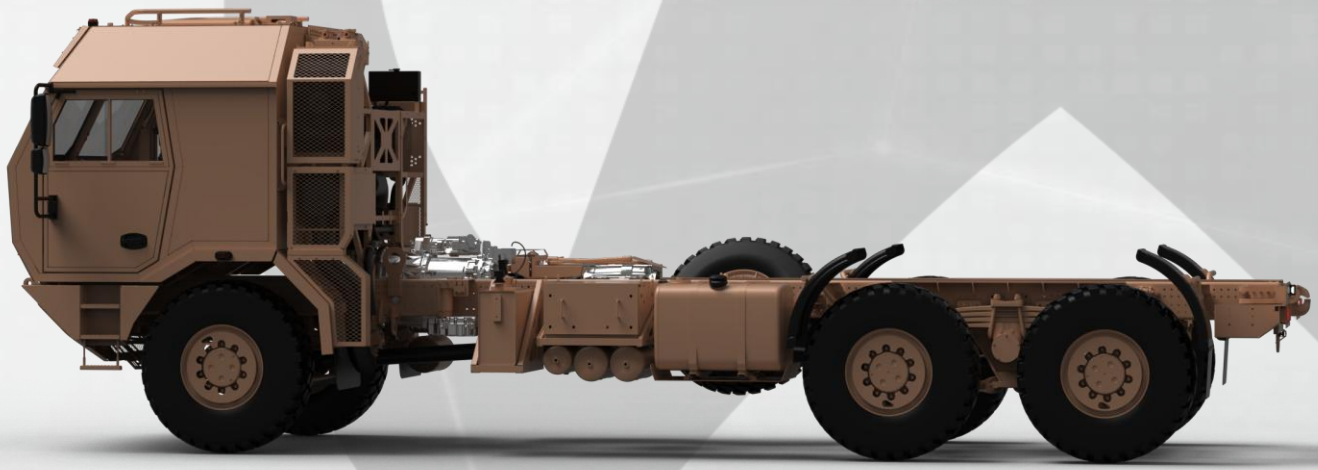

ANADOLU DEFENCE

*Payload capacity may vary depending on the load's center of gravity.
***Anadolu Defence reserves the right to modify the above information without prior notice